



Job Name:

Contact:

Ordering Code:

Fixture Type:

Classic

BRUCK

LEDRA brands



900 ivory



901 black



902 gypsy red



903 larkspur blue



904 british racing green



905 aluminum



906 canary yellow



shown with Wire Guard Accessory

Description

Bruck's Classic spun aluminum shade crosses several design boundaries allowing for a nostalgic or even a modern look. Different light source options, mounting options and colors allow for a unique design. Classic's inspiration was the beautiful paint finishes of classic cars. The gorgeous automotive grade finish brings you back to a Chevy® showroom in 1957.

It is offered in matte chrome, chrome or bronze and is compatible with any Bruck line voltage track as well as Halo® single circuit for retrofit. Chrome and matte chrome finish provided with clear cord. Bronze finish provided with black cord. The pendant can be mounted from Bruck's field adjustable 4" Kiss Canopy and accepts GU24(LED/CLF) or medium base lamping options. Standard overall cable length of 59" can be field-cut or specified when ordering.

Accessory Part Number

900503mc matte chrome

Ordering Codes

Follow the steps to specify your fixture,

example:

1	2	3	4	5
Light Source	Shade Color	Finish	Base Option*	Mounting Option
<p>113 LED</p> <p>110 line voltage</p>	<p>900 ivory</p> <p>901 black</p> <p>902 gypsy red</p> <p>903 larkspur blue</p> <p>904 british racing green</p> <p>905 aluminum</p> <p>906 canary yellow</p>	<p>bz bronze</p> <p>ch chrome</p> <p>mc matte chrome</p>	<p>GU24 base</p> <p>IN medium E26 base</p>	<p>MP 4" Kiss Canopy</p> <p>ecobk ECO/HALO black</p> <p>ecosv ECO/HALO matte silver</p> <p>ecowh ECO/HALO white</p> <p>geobk GEO black</p> <p>geosv GEO matte silver</p> <p>geowh GEO white</p> <p>zonmc Zonyx matte chrome</p> <p>MULTI! Line voltage multi-point</p>

NOTES:

*Options for 110 only. IN replaces standard GU24 base for medium E26 base

NOTES:

*MULTI with 110 line voltage only





Job Name:

Contact:

Ordering Code:

Fixture Type:

BRUCK
LEDRA brands

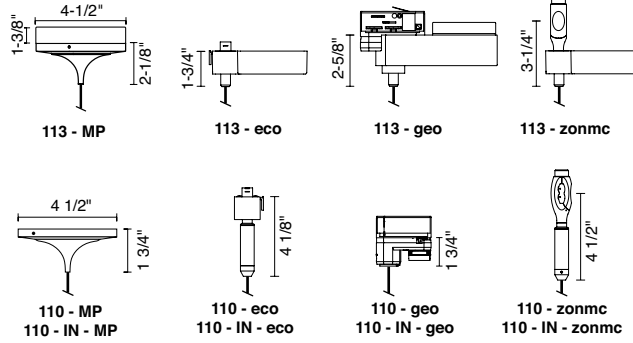

Light Source

113 - LED

110 - line voltage (GU24)

110 - IN - line voltage (E26)

Performance

<p>LED LUMENS CCT SDCM CRI LIFE</p>	<ul style="list-style-type: none"> Nichia 757D 1000 lm 3000k 3 MacAdam Ellipse, +/- 75 Kelvin >90 based on IESNA-LM80-2008: 70% of initial lumens after 60,000 hrs 	<ul style="list-style-type: none"> lamp dependent 	<ul style="list-style-type: none"> lamp dependent
---	---	--	--

Technical Specs

<p>Socket Listing</p>	<ul style="list-style-type: none"> integrated LED module ETLus Listed to UL1598, and UL1574 (Suitable for dry locations only) cETL Listed to CSA C22.2 #250.0 and #9.0 	<ul style="list-style-type: none"> GU24 base socket ETLus Listed to UL1598, and UL1574 (Suitable for dry locations only) cETL Listed to CSA C22.2 #250.0 and #9.0 	<ul style="list-style-type: none"> medium E26 base socket ETLus Listed to UL1598, and UL1574 (Suitable for dry locations only) cETL Listed to CSA C22.2 #250.0 and #9.0
-----------------------	---	--	--

Mounting

<p>4" Kiss Canopy</p>	<ul style="list-style-type: none"> 100-277VAC, 50/60Hz input 18W, 20VA Trailing Edge (ELV) dimming Mount to 3" - 4" round J-Box 	<ul style="list-style-type: none"> 120VAC input 28W, 28VA (max 28W lamp) Dimmable (with compatible lamp) Mount to 3" - 4" round J-Box 	<ul style="list-style-type: none"> 120VAC input 100W, 100VA (max 100W lamp) Dimmable (with compatible lamp) Mount to 3" - 4" round J-Box
<p>Line Voltage Track</p>	<ul style="list-style-type: none"> 100-277VAC, 50/60Hz input 18W, 20VA Trailing Edge (ELV) dimming Connects to line voltage adapter (ECO, GEO, Zonyx) 	<ul style="list-style-type: none"> 120VAC input 28W, 28VA (max 28W lamp) Dimmable (with compatible lamp) Connects to line voltage adapter (ECO, GEO, Zonyx) 	<ul style="list-style-type: none"> 120VAC input 100W, 100VA (max 100W lamp) Dimmable (with compatible lamp) Connects to line voltage adapter (ECO, GEO, Zonyx)
<p>MULTI</p>	<ul style="list-style-type: none"> 100-277VAC, 50/60Hz input 18W, 20VA Trailing Edge (ELV) dimming Connects to line voltage adapter (ECO, GEO, Zonyx) 	<ul style="list-style-type: none"> 120VAC input 28W, 28VA (max 28W lamp) Dimmable (with compatible lamp) Mount to line voltage multi-point canopy Provided with field adjustable cord only 	<ul style="list-style-type: none"> 120VAC input 100W, 100VA (max 100W lamp) Dimmable (with compatible lamp) Mount to line voltage multi-point canopy Provided with field adjustable cord only

Warranty

<ul style="list-style-type: none"> 5 year limited fixture warranty 	<ul style="list-style-type: none"> 1 year limited fixture warranty 	<ul style="list-style-type: none"> 1 year limited fixture warranty
---	---	---



Made in the USA - meets the requirements of the Buy American provision within the ARRA